ATTACHMENT I

EXAMPLE OF LOCAL STORM WATER POLLUTION PREVENTION PLAN

[This page has been left blank intentionally]

WET WEATHER EROSION CONTROL PLAN

WET WEATHER EROSION CONTROL (WWECP) GENERAL NOTES:

1. In case of emergency, call BARBARA LY at (626) 228-8882
   Please fill in name and number
2. A stand-by crew for emergency work shall be available at all times during the rainy season (November 1 to April 15). Necessary materials shall be available on-site and stockpiled at convenient locations to facilitate rapid construction of emergency devices when rain is imminent.
3. Erosion control devices shown on this plan may be removed when approved by the Building Official if the grading operation has progressed to the point where they are no longer required.
4. Graded areas adjacent to fill slopes located at the site perimeter must drain away from the top of slope at the conclusion of each working day. All loose soils and debris that may create a potential hazard to off-site property shall be stabilized or removed from the site on a daily basis.
5. All silt and debris shall be removed from all devices within 24 hours after each rainstorm and be disposed of properly.
6. A guard shall be posted on the site whenever the depth of water in any device exceeds two feet. The device shall be drained or pumped dry within 24 hours after each rainstorm. Pumping and draining of all basins and drainage devices must comply with the appropriate BMP for dewatering operations.
7. The placement of additional devices to reduce erosion damage and contain pollutants within the site is left to the discretion of the Field Engineer. Additional devices as needed shall be installed to retain sediments and other pollutants on site.
8. Desilting basins may not be removed or made inoperable between November 1 and April 15 of the following year without the approval of the Building Official.
9. Storm Water Pollution and Erosion Control devices are to be modified, as needed, as the project progresses, the design and placement of these devices is the responsibility of the field engineer. Plans representing changes must be submitted for approval if requested by the Building Official.
10. Every effort should be made to eliminate the discharge of nonstorm water from the project sites at all times.
11. Eroded sediments and other pollutants must be retained on-site and may not be transported from the site via sheet flow, swales, area drains, natural drainage courses, or wind.
12. Stockpiles of earth and other construction-related materials must be protected from being transported from the site by the forces of wind or water.
13. Fuels, oils, solvents, and other toxic materials must be stored in accordance with their listing and are not to contaminate the soils and surface waters. All approved storage containers are to be protected from the weather. Spills must be cleaned up immediately and disposed of in a proper manner. Spills may not be washed into the drainage system.
14. Excess or waste concrete may not be washed into the public way or any other drainage system. Provisions shall be made to retain concrete wastes on-site until they can be disposed of as solid waste.
15. Developers/contractors are responsible to inspect all Erosion Control Devices and BMP's are installed and functioning properly if there is a 40% chance of 0.25 inches or greater of predicted precipitation, and after actual precipitation. A construction site inspection checklist and inspection log shall be maintained at the project site at all times and available for review by the Building Official (copies of the self-inspection check list and inspection logs are available upon request).
16. Trash and construction-related solid wastes must be deposited into a covered receptacle to prevent contamination of rainwater and dispersal by wind.
17. Sediments and other materials may not be tracked from the site by vehicle traffic. The construction entrance roadways must be stabilized so as to inhibit sediments from being deposited into the public way. Accidental depositions must be swept up immediately and may not be washed down by rain or other means.
18. Any slopes with disturbed soils or denuded of vegetation must be stabilized so as to inhibit erosion by wind and water.
19. As the architect/engineer of record, I have selected appropriate BMPs to effectively minimize the negative impacts of this project's construction activities on storm water quality. The project owner and contractor are aware that the selected BMP's must be installed, monitored and maintained to ensure their effectiveness. The BMPs not selected for implementation are redundant or deemed not applicable to the proposed construction activity."

Civil Engineers/Architects Signature — 12/18/2012 Date

20. The following notes must be on the plan (or submitted as a separate document - prior to plan approval).

As the project owner or authorized agent of the owner, I have read and understand the requirements to control storm water pollution from sediments, erosion, and construction materials, and I certify that I will comply with these requirements. I, or my representative, contractor, developer, or Engineer will make certain that all BMP shown on this plan will be fully implemented, and all erosion control devices will be kept clean and functioning. Periodic inspections of the BMPs will be conducted and a current log, specifying the exact nature of the inspection and any remedial measures, will be kept at the construction site at all times and will be available for the review by the Building Official.

As the project owner or authorized agent of the owner, "I certify that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system or those persons directly responsible for gathering the information, to the best of my knowledge and belief, the information submitted is true, accurate, and complete. I am aware that submitting false and/or inaccurate information, failing to update the Local SWPPP to reflect current conditions, or failing to properly and/or adequately implement the Local SWPPP may result in revocation of grading and/or other permits or other sanctions provided by law."

(Barbara Ly) — 12/20/12
Owner or Authorized Representative (Permittee) — Date

21. The following BMP from the "California Storm Water BMP Construction Handbook" - January 2003, must be implemented for all construction activities as applicable. BMP's from the "California Storm Water BMP Handbook" - March 1993 may be used if detail is indicated.

EROSION CONTROL

EC1 - SCHEDULING
EC2 - PRESERVATION OF EXISTING VEGETATION
EC3 - HYDRAULIC MULCH
EC4 - HYDROSEEDING
EC5 - SOIL BINDERS
EC6 - STRAW MULCH
EC7 - GEOTEXTILES & MATS
EC8 - WOOD MULCHING
EC9 - EARTH DIKES AND DRAINAGE SWALES
EC10 - VELOCITY DISSIPATION DEVICES
EC11 - SLOPE DRAINS
EC12 - STREAMBANK STABILIZATION
EC13 - POLYACRYLAMIDE

TEMPORARY SEDIMENT CONTROL

SE1 - SILT FENCE
SE2 - SEDIMENT BASIN
SE3 - SEDIMENT TRAP
SE4 - CHECK DAM
SE5 - FIBER ROLLS
SE6 - GRAVEL BAG BERM
SE7 - STREET SWEEPING & VACUUMING
SE8 - SANDBAG BARRIER
SE9 - STRAW BALE BARRIER
SE10 - STORM DRAIN INLET PROTECTION

WIND EROSION CONTROL

WE1 - WIND EROSION CONTROL

EQUIPMENT TRACKING CONTROL

TC1 - STABILIZED CONSTRUCTION ENTRANCE EXIT
TC2 - STABLIZED CONSTRUCTION ROADWAY
TC3 - ENTRANCE/OUTLET TIRE WASH

NON-STORMWATER MANAGEMENT

NS1 - WATER CONSERVATION PRACTICES
NS2 - DEWATERING OPERATIONS
NS3 - PAVING AND GRINDING OPERATIONS
NS4 - TEMPORARY STREAM CROSSING
NS5 - CLEAR WATER DIVERSION
NS6 - ILLICIT CONNECTION/DISCHARGE
NS7 - POTABLE WATER/IRRIGATION
NS8 - VEHICLE AND EQUIPMENT CLEANING
NS9 - VEHICLES AND EQUIPMENT FUELING
NS10 - VEHICLE AND EQUIPMENT MAINTENANCE
NS11 - PILE DRIVING OPERATIONS
NS12 - CONCRETE CURING
NS13 - CONCRETE FINISHING
NS14 - MATERIAL AND EQUIPMENT USE
NS15 - DEMOLITION ADJACENT TO WATER
NS16 - TEMPORARY BATCH PLANTS

WASTE MANAGEMENT & MATERIAL POLLUTION CONTROL

WM1 - MATERIAL DELIVERY AND STORAGE
WM2 - MATERIAL USE
WM3 - STOCKPILE MANAGEMENT
WM4 - SPILL PREVENTION AND CONTROL
WM5 - SOLID WASTE MANAGEMENT
WM6 - HAZARDOUS WASTE MANAGEMENT
WM7 - CONTAMINATION SOIL MANAGEMENT
WM8 - CONCRETE WASTE MANAGEMENT
WM9 - SANITARY/SEPTIC WASTE MANAGEMENT
WM10 - LIQUID WASTE MANAGEMENT

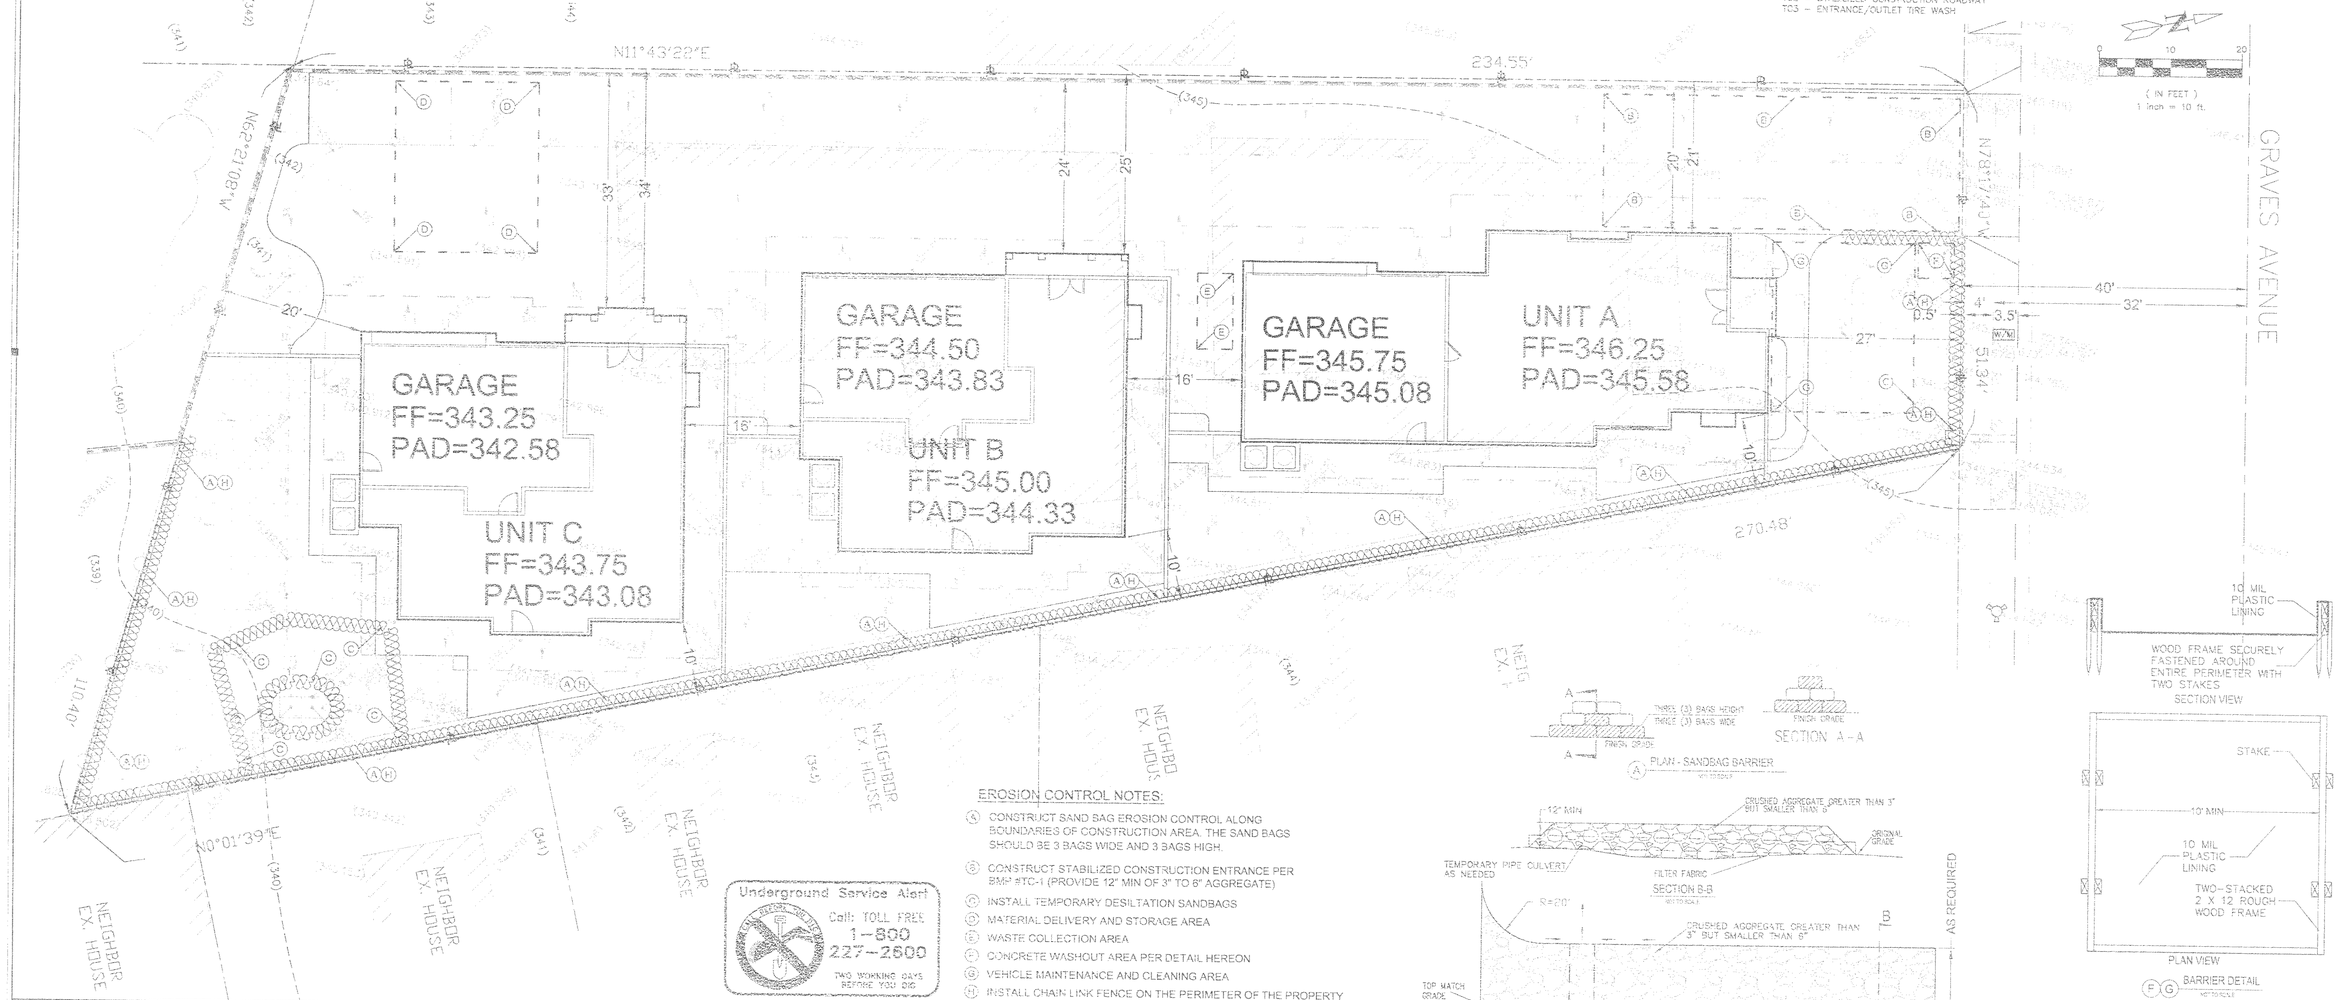

EROSION CONTROL NOTES:

(A) CONSTRUCT SAND BAG EROSION CONTROL ALONG BOUNDARIES OF CONSTRUCTION AREA. THE SAND BAGS SHOULD BE 3 BAGS WIDE AND 3 BAGS HIGH.
(B) CONSTRUCT STABILIZED CONSTRUCTION ENTRANCE PER BMP #TC-1 (PROVIDE 12" MIN OF 3" TO 6" AGGREGATE)
(C) INSTALL TEMPORARY DESILTATION SANDBAGS
(D) MATERIAL DELIVERY AND STORAGE AREA
(E) WASTE COLLECTION AREA
(F) CONCRETE WASHOUT AREA PER DETAIL HEREON
(G) VEHICLE MAINTENANCE AND CLEANING AREA
(H) INSTALL CHAIN LINK FENCE ON THE PERIMETER OF THE PROPERTY

Underground Service Alert
Call: TOLL FREE 1-800 227-2600
TWO WORKING DAYS BEFORE YOU DIG

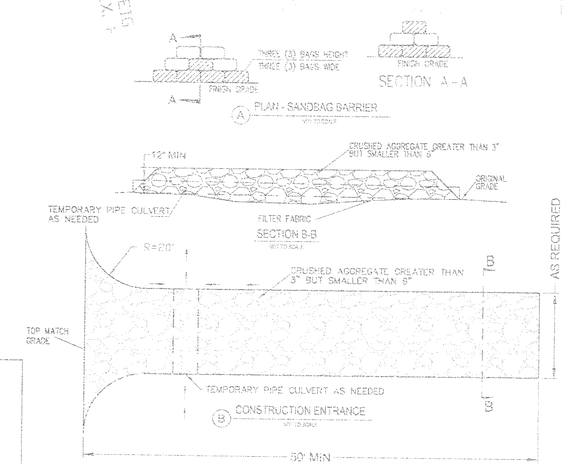

EARTHWORK QUANTITIES

CUT: 162.97 CY IMPORT: 19.89 CY
FILL: 182.86 CY
OVEREXCAVATION: : 980.14 CY

SPECIAL NOTE:

THE QUANTITIES SHOWN HEREON ARE FOR PERMIT AND BONDING PURPOSES ONLY. THE CONTRACTOR SHALL VERIFY QUANTITIES PRIOR TO START OF GRADING

LEGAL DESCRIPTION

VAC ST ADJ ON NE AND LOT 10, TRACT NO. 7165, IN THE CITY OF ROSEMEAD, IN THE COUNTY OF LOS ANGELES, STATE OF CALIFORNIA, AS PER MAP RECORDED IN BOOK 80 PAGES 69 TO 70 OF MAPS, IN THE OFFICE OF THE COUNTY RECORDER OF SAID COUNTY.

BENCH MARK

LACPWSD BM #G-10697 BASELINE (2005)

LACO BM TAG IN E CB 2M (6.5FT) N/O BCR @ NE COR SAN GABRIEL BLVD. & RUSH ST.

ELEVATION = 271.638'

OWNER:

BARBARA LY
7862 GRAVES AVENUE,
ROSEMEAD, CA 91770
TEL: (626) 228-8882
EMAIL: bly@lasuperiorcourt.org

REGISTERED PROFESSIONAL ENGINEER — JACK C. S. LEE — 2153 — Exp. 3-31-13 — GEOTECHNICAL — STATE OF CALIFORNIA

REGISTERED PROFESSIONAL ENGINEER — JACK C. S. LEE — 40870 — Exp. 3-31-13 — CIVIL — STATE OF CALIFORNIA

GPC NO. 70753-00P1
PARCEL MAP NO. 70753

CALLAND ENGINEERING, INC.
dba QUARTECH CONSULTANTS
576 E. LAMBERT ROAD, BREA, CA 92821
TEL: (714) 671-1050 FAX: (714) 671-1090

RELEASED

REVISIONS

PROJECT LOCATION:
7862 GRAVES AVENUE,
ROSEMEAD, CA 91770

EYS
12-17-2012
07-086-020
1" = 10'

C-3

SHEET 3 OF 3 SHT.